



■ 优点【Advantages】

- 1、全塑胶 / 全金属 / 半金属三种结构可选，可满足不同场景对抗干扰、高强度、高耐蚀等差异化诉求；
- 2、小巧玲珑、精致耐用，可适应设备对连接器小型化、轻型化的要求；
- 3、采用一键按扣式锁紧方式，即插即用，快捷方便；
- 4、多重防水设计，具备高防水性能，可避免外部水液侵入。

1. Full plastic, full metal and semi-metal structures are optional, which can meet the differentiated demands of anti-interference, high strength, and high corrosion resistance in different scenarios;
2. Small and exquisite, exquisite and durable, which can meet the requirements of equipment for miniaturization and light-weight connectors;
3. one-click button locking method is adopted, plug and play, fast and convenient;
4. Multiple waterproof design, with high waterproof performance, can avoid the intrusion of external water and liquid.



■ 尺寸图【Dimension Drawing】

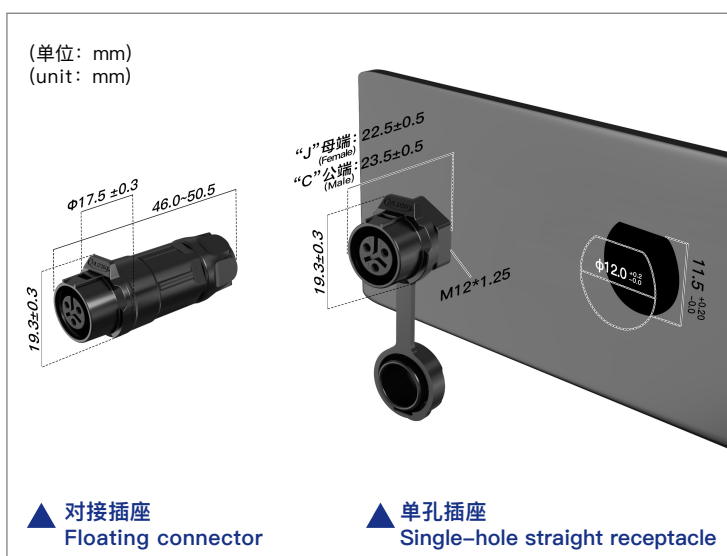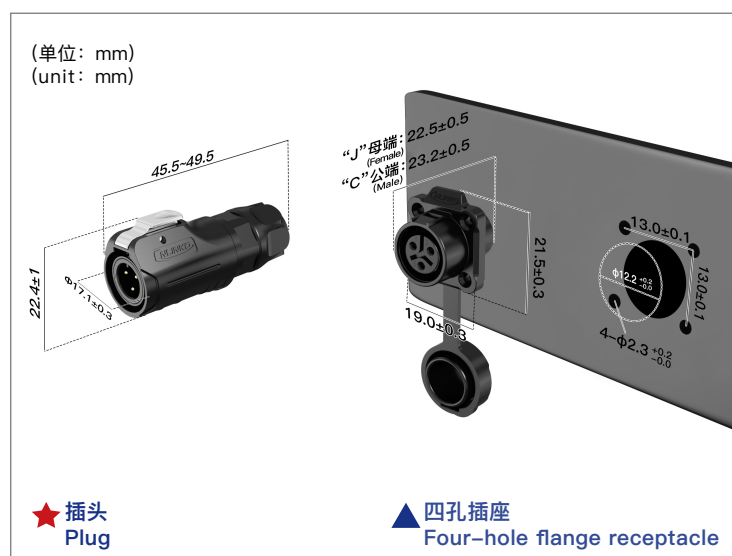

■ 规格【Specifications】

电气性能 Electrical		机械性能 Mechanical		环境性能 Environmental		材料 Material	
额定电流 Rated current	5A	耐久度 Min Operating cycles	Min 500 次 500 times	防护等级 IP code	IP68	外壳 / 绝缘部分 Shell&insulated parts	PBT PBT
额定电压 Rated voltage	125V AC	线材规格 Max Wire gauge	0.34~0.5mm ² 22~20AWG	温 升 Max Temperature rise Max	30k 30K	金属部分 Hardware metal	锌合金 Zinc alloy
耐 压 Withstand voltage	1500V AC	适用线径 Cable OD	φ4.5~φ5.5mm	工作温度 Operating temperature	-25℃~+85℃	接触件 Contact member	铜合金镀金 Copper alloy with gold plating
接触电阻 Max Contact resistance Max	5.0mΩ	接线方式 Terminal Type	焊接 Soldering			密封件 Sealing strip	橡胶 rubber
绝缘电阻 Min Insulation resistance(Min)	500MΩ						
接 触 件 Contact diameter	φ1.0*3						

■ 多种模块组合【Multiple Module Combinations】

模 块 Pin Number								—	—	—	—	—	—
额定电流 Current rated	5A	5A	5A	5A	5A	3A	3A	—	—	—	—	—	—

具体料号可扫码咨询客服了解。

Specific part number can scan code consult customer service to understand.