


DH24


Standard Size


Plastic & Metal Plug

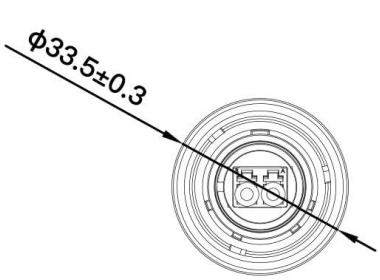


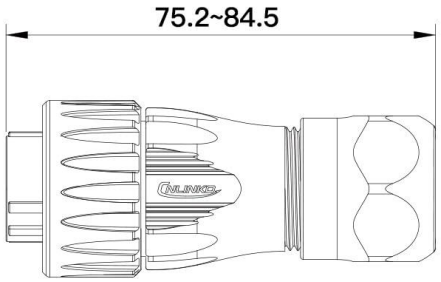

Four-Hole Socket

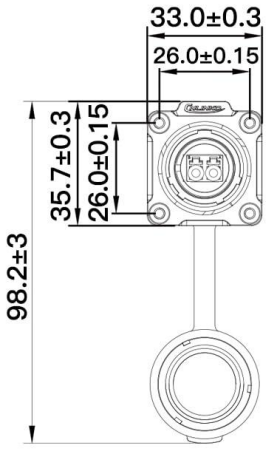

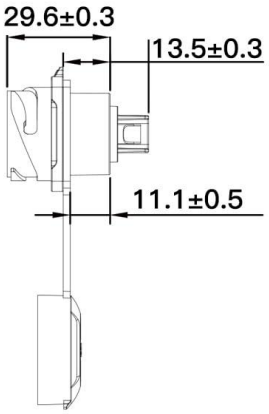



Connector Specifications

Model Map	
Model	Fiber optic (single mode dual core)
Transmission Speed	10Gbps
Insertion Loss Max	0.35dB
Return Loss Min	50dB
Cable 0.D Range	ϕ5-ϕ6mm
Contact Points	2
Protection Level	IP68(2m/48h)
Mechanical Life	over 2000 cycles
Operating Temperature	-40°C~+120°C
Salt Spray	⩾48H
Certifications	TUV, UL,CE, ROHS,ISO9001