







Standard Size

Plastic & Metal Plug

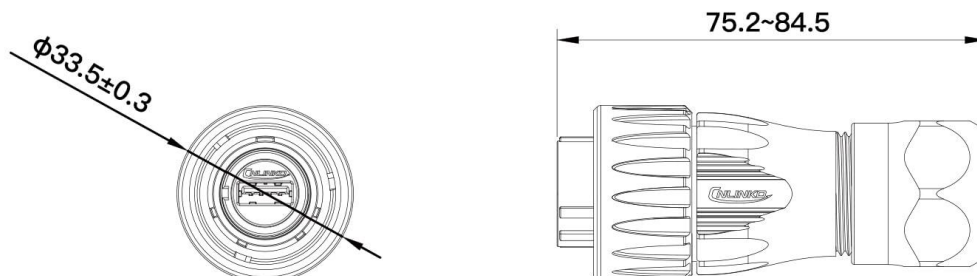

Four-Hole Socket

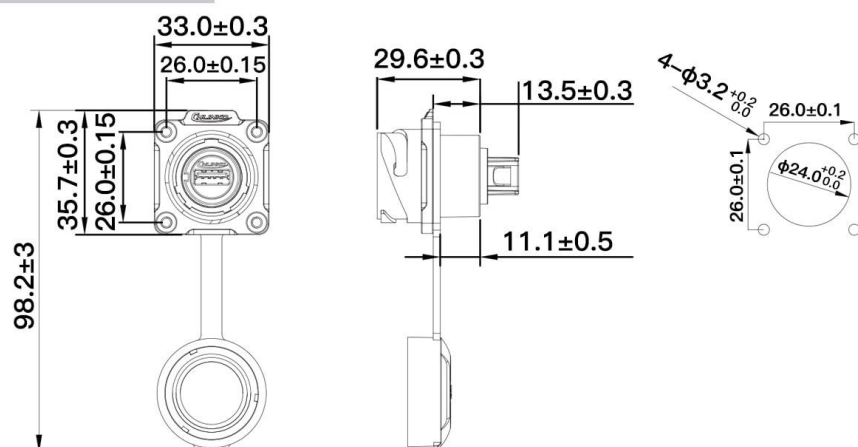

Connector Specifications

Model Map	
Model	USB3.0
Rated Current	1.8A
Rated Voltage	5V AC
Transmission Speed	5Gbps
Cable O.D Range	φ5-φ7mm
Contact Resistance Max	30mΩ
Insulation Resistance Min	100MΩ
Contact Points	9
Temperature Rise Max	30K
Protection Level	IP68(2m/48h)
Mechanical Life	over 2000 cycles
Operating Temperature	-40°C~+120°C
Salt Spray	≥48H
Certifications	TUV, UL,CE, ROHS,ISO9001