







Standard Size

Unit: mm

Plug

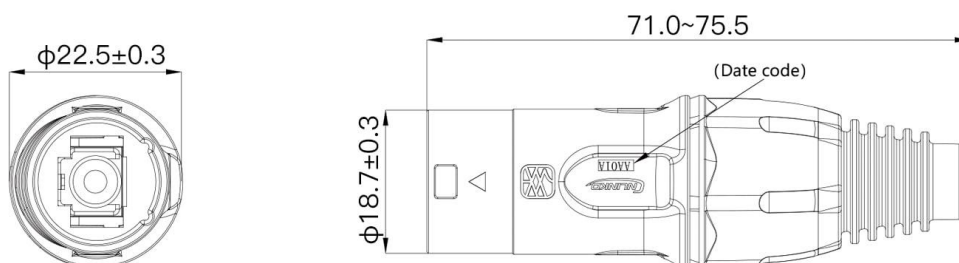

Straight Through Dual Ports Socket

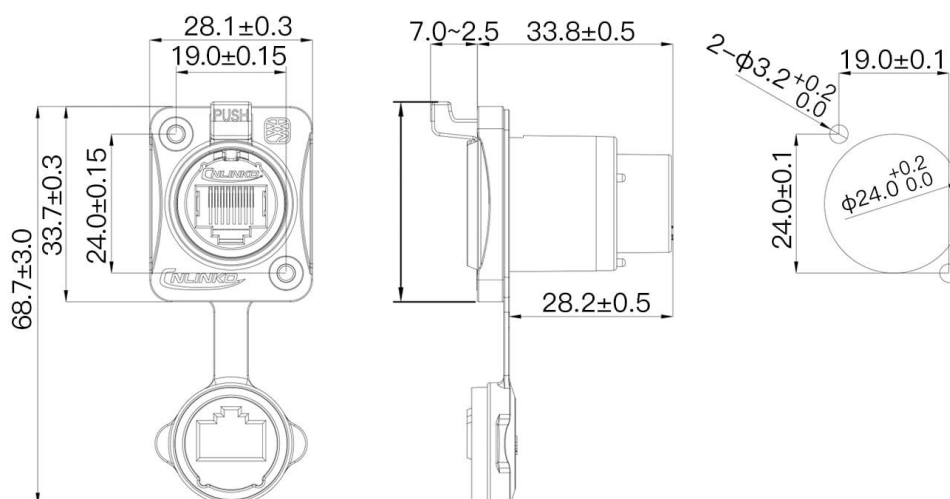

Connector Specifications

Mode	
Rated Current	1.5A
Working Voltage	125V AC
Withstanding Voltage	1000V AC
Contact Resistance Max	30mΩ
Insulation Resistance Min	500MΩ
Transmission Rate	CAT.3
Cable O.D Range	φ5-φ6.8mm
Protection Level	IP65
Mechanical Life	Over 2000 Times
Operating Temperature	-40℃ ~ +120℃
Salt Spray	≥48H
Certifications	TUV, UL,CE, RoHS