




Standard Size

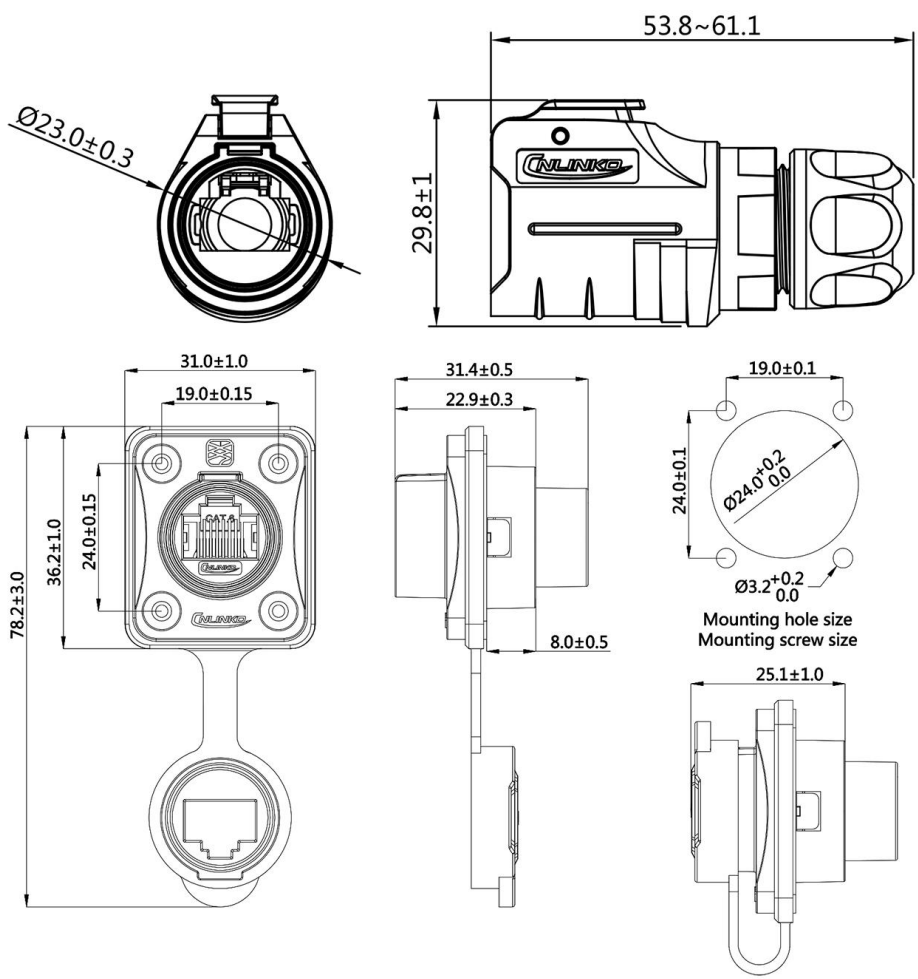

Connector Specifications

Pin Map	
Rated Current	1.5A
Rated Voltage	125V AC
Insulation Resistance Min	500MΩ
Transmission Rate	CAT.6
Wire Gauge	Φ5.0-Φ7.0mm
Protection Level	IP68
Mechanical Life	over 2000 cycles
OperatingTemperature	-40°C~+120°C
Salt Spray	≥48H
Certifications	Complies with TUV & UL certification standards