DH24 产品规格书 Datasheet

CNLINKO 凌科电气

优点【Advantages】


1、全合金外壳，高抗压高耐磨，可实现电磁屏蔽和抗干扰诉求;
2、采用三点螺旋式连接方式，连接牢靠，安全稳固;
3、全方位防水结构设计，并辅以硅胶密封圈，实现高防水性能;
4、壳体采用多彩色系视觉区分，电源、数据与信号类型一眼即辨。


1. All-alloy shell, high pressure resistance, high wear resistance, can meet the requirements of electromagnetic shielding and anti-interference;
2. Adopt three-point threaded connection, which is reliable, safe and stable;
3. All-round waterproof structure design, supplemented by silicone sealing ring, to achieve high waterproof performance;
4. The shell adopts a multi-color system to visually distinguish, and the power, data and signal types are clear at a glance.



尺寸图【Dimension Drawing】

(单位:mm)
(unit:mm)

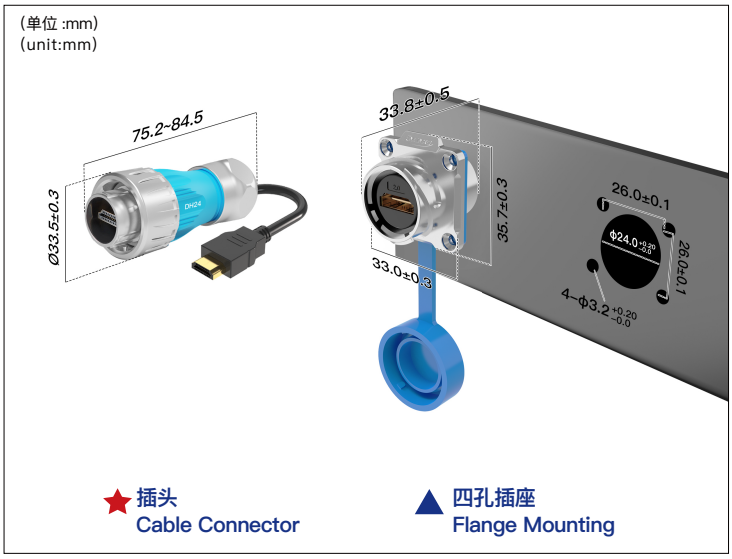

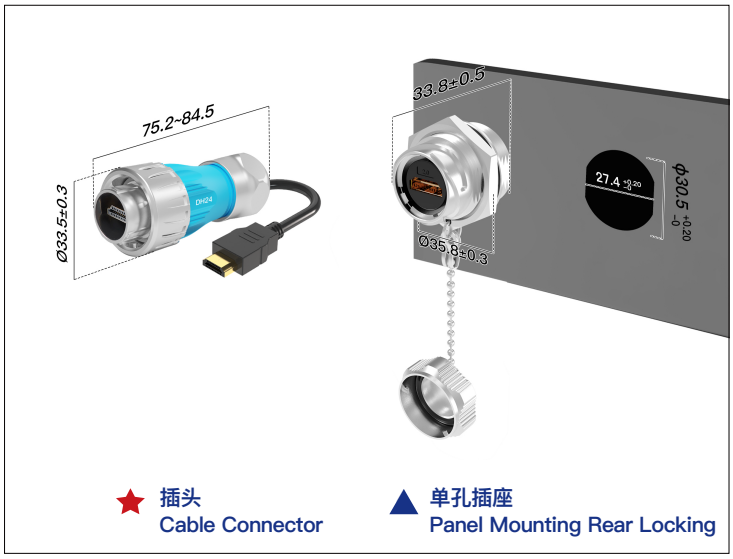

规格【Specifications】

电气性能 Electrical	
额定电流 Current rated	0.5A
额定电压 Rated voltage	5V AC
耐　压 Withstand voltage	100V AC
接触电阻 Max Contact resistance Max	30mΩ
绝缘电阻 Min Insulation resistance Min	100MΩ

机械性能 Mechanical	
耐 久 度 Min Life cycle Min	500 次 500 times
线材规格 Max Wire specification Max	/
适用线经 Cable O.D range	/
接线方式 Assembly style	/

环境性能 Environmental	
防护等级 Protection level	IP68/IPX9K
温 升 Max Temperature rise Max	/
工作温度 Temperature rating	-40℃~+85℃

材料 Material	
外壳 shell	铝合金 / 锌合金
密封件 Sealing	硅橡胶 Silicone rubber
绝缘体 Insulator	PBT
接触件规格 Contact Spec	/
接触件材料 Contact Material	铜合金 Copper alloy
接触件表面处理 Contact Surface treatment	镍底 / 镀金 Ni/Au

多种模块组合【Multiple Module Combinations 】

模　块 Pin Number	2PIN	3PIN	3PIN	4PIN	5PIN	10PIN	12PIN	14PIN	19PIN	24PIN	RJ45-CAT.3	RJ45-CAT.6	USB2.0/ USB3.0	音视频 2.0	音视频 2.1	光纤 (单模单芯)	光纤 (单模双芯)
额定电流 Current rated	25A/35A	25A/35A	45A	25A	20A	10A	10A	5A	5A	5A	1.5A	1.5A	1.5A/1.8A	0.5A	0.5A	-	-

具体料号可扫码咨询客服了解 .
Specific part number can scan code consult customer service to understand.

认证&体系 Certificate

IATF 16949

凌科官网　CNLINKO WEB